

PC

Even first-timers will find it easy to take great photos.

28mm Wide-Angle



35mm



28mm

Fit tall buildings and groups of people into the picture!

4x Zoom



Wide angle



2x Optical zoom



4x Optical zoom



Silver

Black

DIGITAL CAMERA
FinePix F480

SPECIFICATIONS

DIGITAL CAMERA FinePix F480

Number of effective pixels ^{#1}	8.2 million pixels
CCD sensor	1/2.5-inch
Storage media	Internal memory (Approx. 12MB) / xD-Picture Card™ (16MB - 2 GB) / SD memory card / SDHC memory card ^{#2}
File format	Still image : JPEG (Exif Ver. 2.2 ^{#3}) / Movie : AVI (Motion JPEG) [Design rule for Camera File system compliant/DPOF-compatible]
Number of recorded pixels	Still image : 3,264 × 2,448 (8M) / 3,664 × 2,176 (3 : 2) / 2,304 × 1,728 / 1,600 × 1,200 / 640 × 480
Lens	Fujinon 4x Optical zoom lens, F2.8 - F5.6
Lens focal length	f=4.6mm - 18.4mm, Equivalent to 28 - 112mm on a 35mm camera
Digital zoom	Approx. 6.9x
Aperture	Wide-angle : F2.7/5.4
Focus distance	Normal : Approx. 40cm / 1.3 ft. to infinity Macro : Wide Angle : Approx. 5cm / 2.0 in. to 80cm / 2.6 ft. Telephoto Angle : Approx. 30cm / 1.0 ft. to 80cm / 2.6 ft.
Sensitivity	AUTO/Equivalent to ISO 100 / 200 / 400 / 800 (Standard Output Sensitivity)
Exposure control	TTL 64-zones metering
Exposure mode	Programmed AE
Shooting modes	Mode dial : Auto, Baby mode, Picture Stabilization, Red-eye Reduction, Digital zoom, Portrait, SP (Scene Position), Movie SP : Landscape, Sport, Night, Natural light, Beach, Snow, Fireworks, Sunset, Flower, Party, Museum, Text, Manual
Shutter speed	4 sec. to 1/1500 sec. (depends on exposure)
Continuous shooting	Top-3
Focus	Auto Focus (Center)
White balance	Automatic scene recognition Preset (Fine, Shade, Fluorescent light (Daylight), Fluorescent light (Warm White), Fluorescent light (Cool White), Incandescent light)
Self-timer	Approx. 10 sec./2 sec. delay
Flash	Auto flash Effective range : (ISO AUTO) : Telephoto angle : Approx. 0.5m / 1.6 ft. to 4m / 13.1 ft. Wide angle : Approx. 0.5m / 1.6 ft. to 2.2m / 7.2 ft. Macro : Approx. 0.5m / 1.6 ft. to 0.8m / 2.6 ft. Flash mode : Auto, Red-eye Reduction, Forced Flash, Suppressed Flash, Slow Synchro
LCD monitor	2.7 inch, 230,000 pixels, Amorphous silicon TFT color LCD monitor, Approx. 100% coverage
Movie recording	320 × 240 pixels, 30 frames/sec. With monaural sound, AVI format (Motion JPEG) *Zoom function cannot be used during movie recording.
Photography functions	Best framing, Frame No.memory
Playback functions	Slide show, Trimming, Single frame, Multi-frame playback, Sorting by date, Image rotate
Video output	NTSC / PAL selectable
Digital input / output	USB 2.0 High speed
Power source	NP-40N Li-ion battery (included)
Dimensions	95.6 (W) × 55.4 (H) × 23.0 (D) mm / 3.8 (W) × 2.2 (H) × 0.9 (D) in. (excluding accessories and attachments)
Weight	Approx. 140g/4.9 oz. (excluding accessories, batteries and memory card)
Accessories included	Li-ion battery NP-40N, Battery charger BC-40N, Hand Strap, A/V cable, USB cable, CD-ROM : FinePixViewer-S / FinePixViewer, Owner's Manual
Optional accessories	xD-Picture Card™ : 256MB, 512MB, 1GB, 2GB Battery charger BC - 65S, AC Power Adapter AC-5VX, PC Card Adapter DPC-AD, CompactFlash™ Card Adapter DPC-CF

Guide to the number of available frames for battery operation

Battery	LCD monitor status	Number of frames
NP-40N	LCD monitor ON	Approx. 150

According to the Camera & Imaging Products Association (CIPA) standard.^{#4}
The battery (NP-40N) is supplied with the camera.

^{#1} Number of effective pixels: The number of pixels on the image sensor which receive input light through the optical lens, and which are effectively reflected in the final output data of the still image.
^{#2} Please see the Fujifilm website to check memory card compatibility.
^{#3} Exif 2.2 is a newly revised digital camera file format that contains a variety of shooting information for optimal printing.
^{#4} "CIPA DC-002-2003 'Standard Procedure for Measuring Digital Still Camera Battery Consumption'" (extract) Pictures shall be taken at a temperature of 23°C, with the LCD monitor turned on, the zoom moved from full wide-angle to full telephoto (or vice-versa) and back again to its original position every 30 seconds, the flash used at full power every second shot and the camera turned off and on again once every 10shots.



Microsoft, Windows, and Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. xD-Picture Card™, SD logo and all other trademarks are the property of their respective holders.

FUJIFILM
FUJIFILM Corporation

For more information, please visit our Website:
http://www.fujifilm.com/products/digital_cameras/index.html

Specifications are subject to change without notice.
All sample photos are simulated images.


Ref. No. EB-701E (SK - 07 - 07 - F1120 - F9711) Printed in Japan © 2007 FUJIFILM Corporation



FUJIFILM

DIGITAL CAMERA
FinePix F480

8.2 Megapixels 4x Optical Zoom Wide-Angle 28mm 2.7-inch LCD
xD/SD Compatible Slot

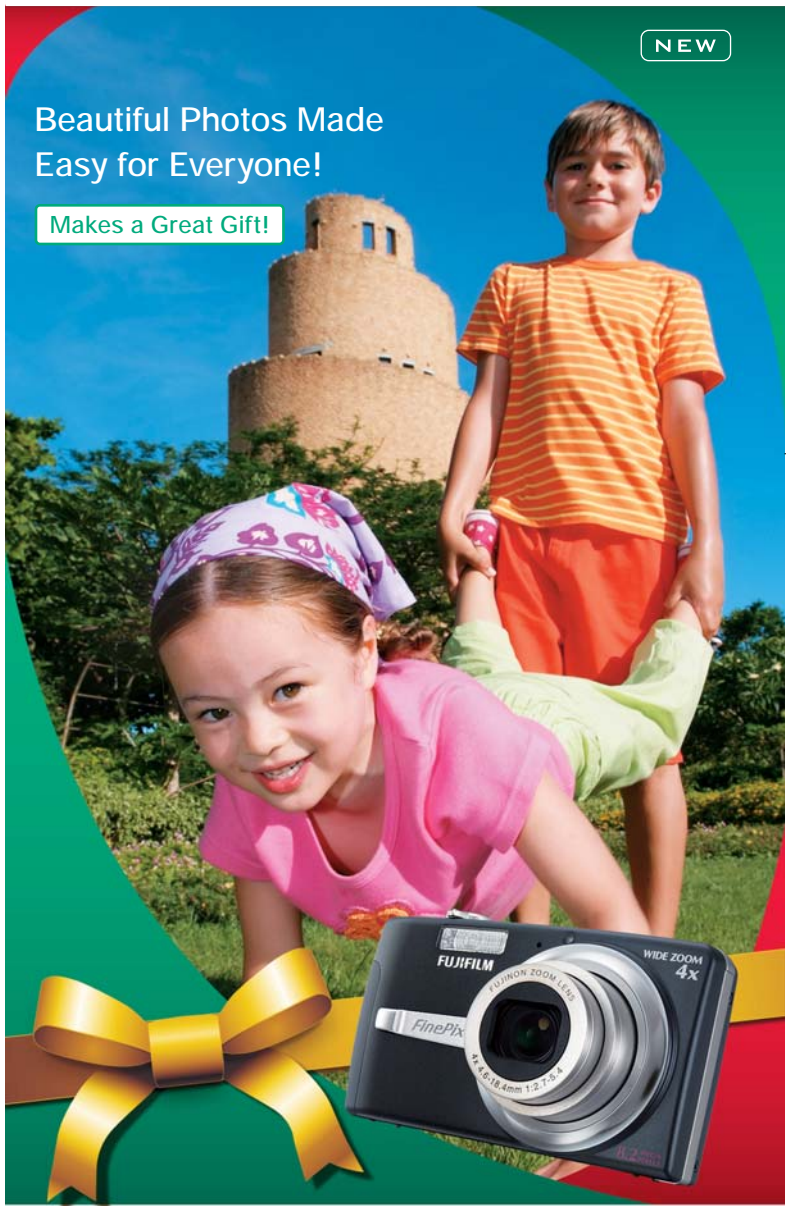

Beautiful Photos Made Easy for Everyone!

Makes a Great Gift!

NEW



受注番号	得意先名	品名	色数	サイズ	日付・作業担当者				作業MAC	運行担当
					1	2	3	4		
32-1474024	(株)電通様	FinePix F480リーフ(英語)	4C	210mm 297mm	07/10 徳部	07/13 徳部	00/00	00/00	00/00	PC ■■■

